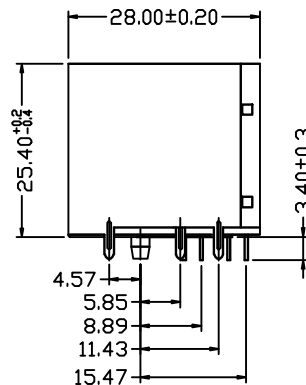
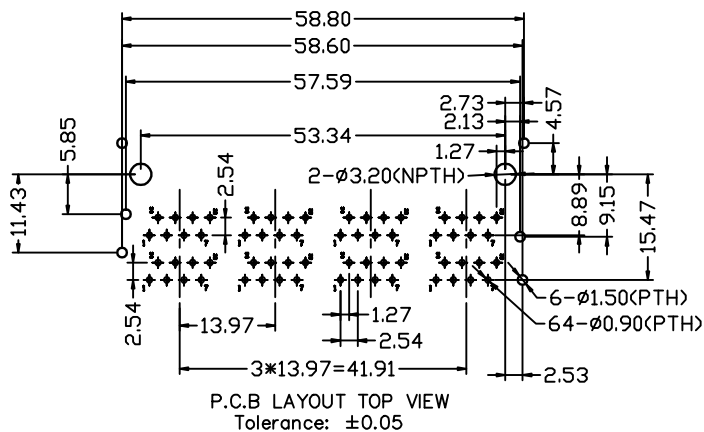
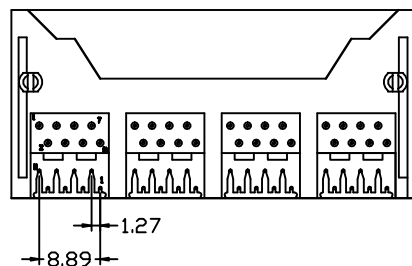
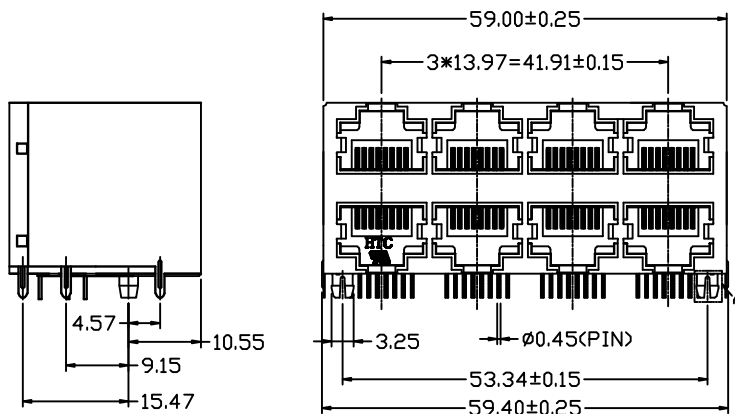


REVISIONS				
REV	ECN	DESCRIPTION	DATE	BY

SPECIFICATION:

Electrical:

- Current Rating:1.5Amp MAX. 65°C
- Voltage Rating:150VAC MAX.
- Insulation Resistance:500 Megohms MIN.
- Contact Resistance:20 milliohms MAX. (initial)
- Withstanding Voltage:

Contact to Contacts: 1,000 VDC or AC Peak for 1 minute
Contact to Shield: 1,000 VDC or AC Peak for 1 minute

Mechanical:

- Operating Temperature:-40°C~+85°C
- Storage Temperature: -40°C~+85°C
- Durability: 750 Mating Cycles MIN.

Material:

- Housing:High Temperature Thermoplastic UL94V-0
- Insert : High Temperature Thermoplastic UL94V-0.
- Contact:ø0.4mm Phosphor CU90/10, Gold Plating Nickel.
- Shield: 0.15mm Thickness Copper Alloy Ni Plated

Wave Soldering: 250+/-5°C, 5 sec max;
Resistance to solder : 250+/-5°C, 10 +/- sec
packaging: Tray

Part No.: PJ-D4-FX00-AA017-1

R:8Point 8Contact Platint Gold 1:G/F

Plastic Material X:PA6T A017: 无弹片, 无灯 定位柱蘑菇头直径3.25

Plastic Color BLACK A: WITH SHIELD, MTC MARK

TOLERANCE	SIGNATURES		DATE	HUNTER 赛拓科技股份有限公司 东莞行特电子有限公司	
ANGLE ±0.5°	DESIGN:	David	2023-04-29		
.X ±0.25	CHECKED:	David	2023-04-29	TITLE	RJ45 W/0 LED 2X4 PORTS FULL PACKED
.XX ±0.15	APPROVAL:	Herry	2023-04-29		
.XXX ±0.10	SHEET	SCALE	UNIT	REV	
1 OF 1			mm	A/02	PART NO. PJ-D4-FX00-AA017-1