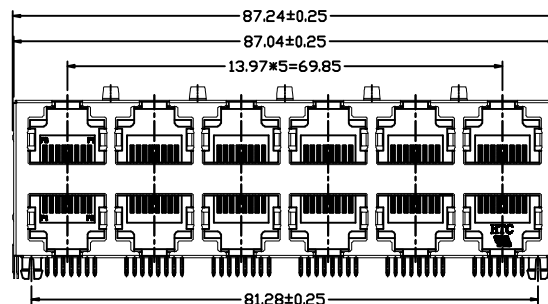
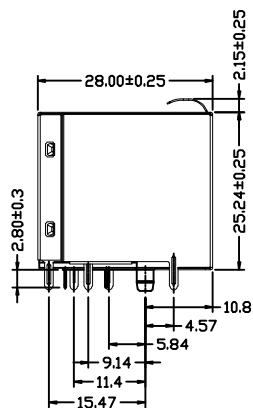


Part No.:

PJ-D6-FX00-B3075-7

Point Contact
Housing Material
Plastic Color
00:Black

Plated Gold
7:Plating

3075:5脚片不镀铜壳, 脚片加厚, DIP2.8初尖脚

SPECIFICATION:

Electrical:

Current Rating:1.5Amp max @25℃
Voltage Rating:150VAC max
Insulation Resistance:500 megohms min
Contact Resistance:30 milliohms max
Withstanding Voltage:1000 VAC

Mechanical:

Durability:750 Cycles
Operating Temperature:-40℃~+85℃
Storage Temperature:-40℃~+85℃
Contact Normal Force:100g Minimum

Material:


Housing:High Temperature Thermoplastic UL94V-0,PA6T
Shield: 0.2mm Thickness Stainless Steel SUS304, Plating Ni 30u"
Contact:0.45mm*0.35mm Phosphor Bronze C5210-RI
Plating: 50u" Nickel Underplating,

Pu" Gold Plating Over Nickel In Contact,
100u" TIN Plating Over Nickel In Solder Area.

Area Soldering Temperature: 280+/-5℃,5sec/95%Area be covered

Withstand Temperature: 270+/-5℃,5sec No stick tin melting phenomenon

UL No: E234095

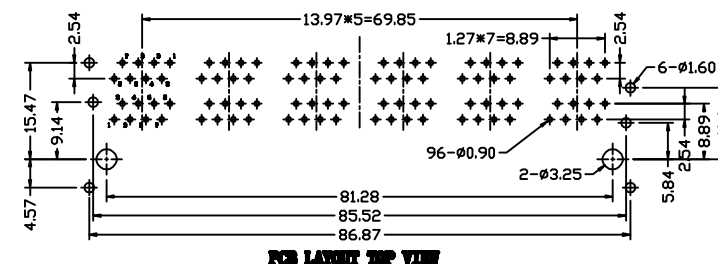

PCB LAYOUT TOP VIEW

Draw No. :PJ-D6-FX00-B3075-7-A0186

REVISIONS					TOLERANCE	SIGNATURES	DATE	HUNTER 聚拓科技股份有限公司 东莞行特电子有限公司	
REV	ECO	DESCRIPTION	DATE	BY	ANGLE .X ±0.5° .XX ±0.25 .XXX ±0.15 XXX ±0.10	DESIGN: samir	21.09.17		
A/02		变更底部镭雕内容	21.09.17	samir		CHECKED:		TITLE	RJ45 2*6 WITH SPRING
						APPROVAL:		PART NO.	PJ-D6-FX00-B3075-7
					SHEET	SCALE	UNIT	REV	
					1 OF 1		MM	A/02	