


Part No.

PJ-L1-FZ02-E0670-7

F: 8Point 8Contact
PLASTIC MATERIAL
PLASTIC COLOR
02: Yellow 114C

PLATING GOLD
7: P.A.
0670: 無蓋, RJ11防呆
B: 全型 HTC mark

SPECIFICATION:

Electrical:




Current Rating: 1.5Amp max @25℃
Voltage Rating: 150VAC max
Insulation Resistance: 500 megohms min
Contact Resistance: 20 milliohms max(Initial)
Withstanding Voltage: 1000 VAC

Mechanical:


Durability: 750 Cycles
Operating Temperature: -40℃~+70℃
Storage Temperature: -50℃~+75℃
Contact Normal Force: 100g Minimum
Material:
Housing: Thermoplastic UL94V-0, PBT
Contact: 0.35*0.45mm Phosphor Bronze
Gold Plating Over Nickel In Contact,
Tin Plating Over Nickel In Solder

Area.

For wave Soldering Temperature:
260+/-5℃, 5sec/95%Area covered
Withstand Temperature: 230+/-5℃, 5sec No
stick tin melting phenomenon
UL No: E234095

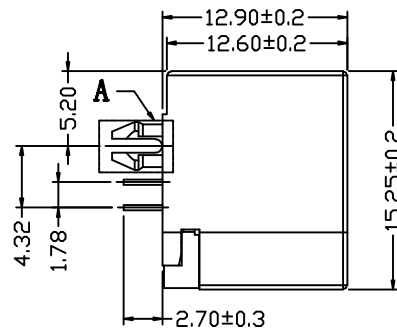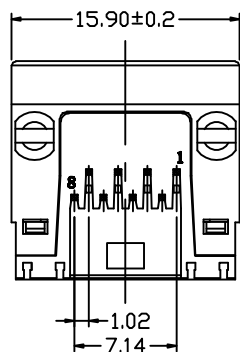

DETAIL A

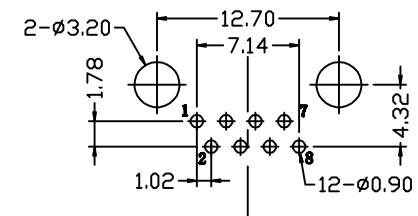

P.C.B LAYOUT TOP VIEW

Drawing No: PJ-L1-FZ02-E0670-7-01

REVISIONS					TOLERANCE		SIGNATURES		DATE	HUNTER	寰拓科技股份有限公司 東莞行特電子有限公司
REV	ECD	DESCRIPTION	DATE	BY	ANGLE		DESIGN				
					.X	±0.5°		Hedy	23.08.01		
					.XX	±0.25	CHECKED	Cary	23.08.01		
					.XXX	±0.15	APPROVAL			TITLE	RJ45 W/LED SINGLE PORT W/O SHIELD
						±0.10					
					SHEET		SCALE	UNIT	REV	PART NO.	PJ-L1-FZ02-E0670-7
					1 OF 1			MM	A/01		