

REVISIONS				
REV	ECN	DESCRIPTION	DATE	BY

SPECIFICATION:

Electrical:

- Current Rating:1.5Amp MAX. 68°C
- Voltage Rating:180VAC MAX
- Insulation Resistance:800 Megohms MIN.
- Contact Resistance:20 milliohms MAX. (Initial)
- Withstanding Voltage:
 - Contact to Contact: 1,000 VDC or AC Peak for 1 minute
 - Contact to Shield : 1,000 VDC or AC Peak for 1 minute

Mechanical:

- Operating Temperature:-40 ℃~+65℃
- Storage Temperature: -40 ℃~+65℃
- Durability: 750 Mating Cycles MIN.


Material:

- Housing:Thermoplastic UL94V-0 COLOR: YELLOW (114C)
- Contact: 0.45mm*0.35mm Phosphor Bronze C5210





For Wave Soldering Temperature: 230~250℃, 5-10sec
packaging: Tray

Part No. : PJ-L3-FZ02-E8019-1

P:Point 8Contact		P:Platint Gold 7:Pu"
Plastic Material Z:PB		8019: 無鍍
Plastic Color See Material		R 全鍍, HTC MARK

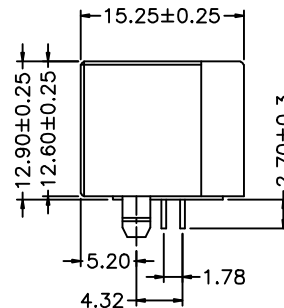

DETAIL A

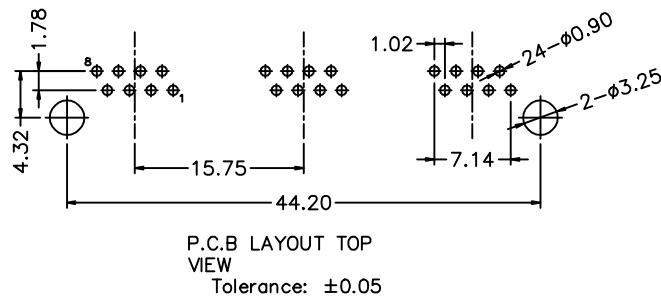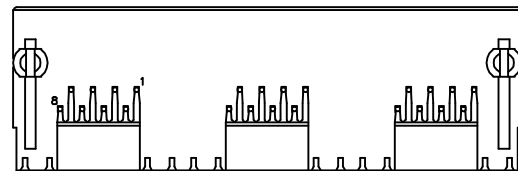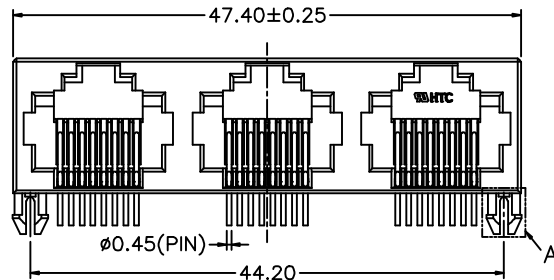

TOLERANCE		SIGNATURES		DATE	HUNTER 振拓科技股份有限公司 東莞行特電子有限公司	
ANGLE	±0.5°	DESIGN:	Loen	2023-08-30		
.X	±0.25	CHECKED:	David	2023-08-30	TITLE	RJ45 W/O LED 1x3 PORT W/O SHIELD
.XX	±0.15	APPROVAL:	Andy	2023-08-30		
.XXX	±0.10	SHEET	SCALE	UNIT	REV	
		1 OF 1		mm	A/01	PART NO. PJ-L3-FZ02-E8019-1