

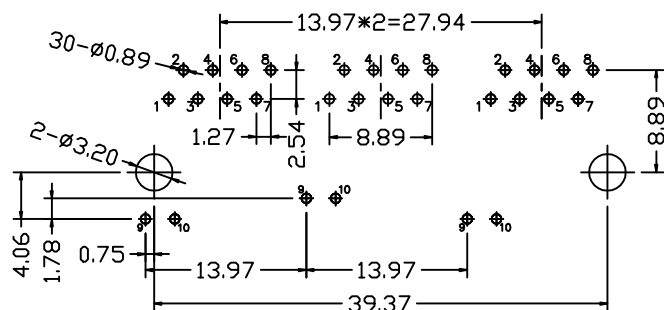
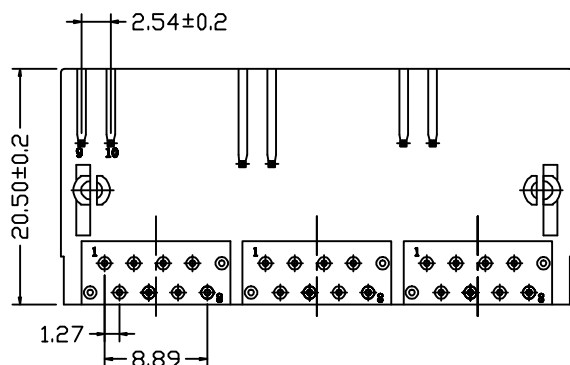
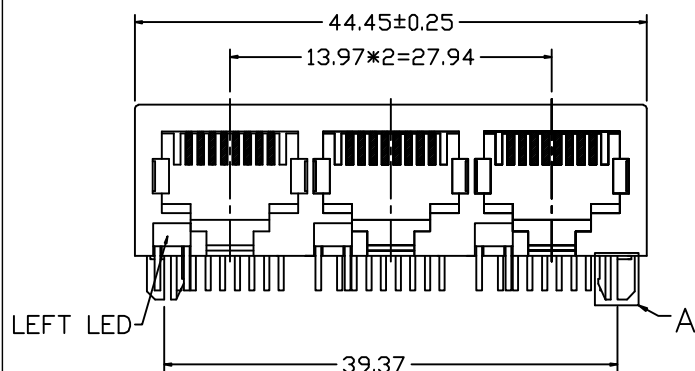


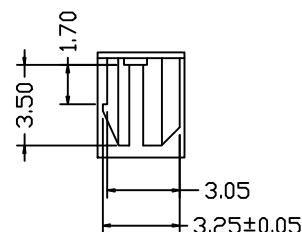

PCB LAYOUT TOP VIEW
TOLERANCE:±0.05mm

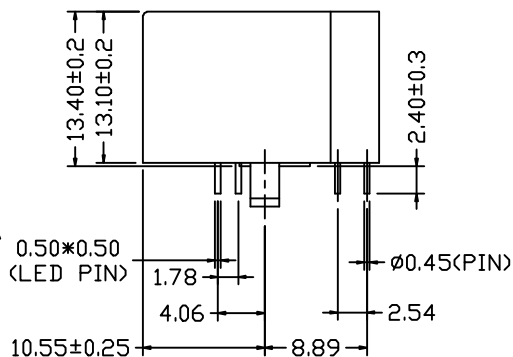

DETAIL A 2:1

LED SCHEMATIC

LED1		
颜色	脚位	波长 (nm)
Green	Green 9 $\pm$ 10	563-575

REVISIONS				
REV	ECO	DESCRIPTION	DATE	BY

SPECIFICATION:

Electrical:

- Current Rating:1.5Amp MAX. 685℃
- Voltage Rating:180VAC MAX.
- Insulation Resistance:500 Megohms MIN.
- Contact Resistance:20 milliohms MAX. (Initial)
- Withstanding Voltage:
 - Contact to Contact: 1,000 VDC or AC Peak for 1 minute
 - Contact to Shield : 1,000 VDC or AC Peak for 1 minute

Mechanical:

- Operating Temperature:-40 ℃~+85℃
- Storage Temperature: -40 ℃~+85℃
- Durability: 750 Mating Cycles MIN.


Material:

- Housing:High Temperature Thermoplastic UL94V-0
COLOR: BLACK
- Insert : High Temperature Thermoplastic UL94V-0,
COLOR: BLACK
- Contact: Ø0.45mm Phosphor C51000, Gold Plating

Nickel

For Wave Soldering Temperature: 280~+5℃,5-10sec
packaging: Tray

Part No.: PJ-C3-BY00-N1255-1

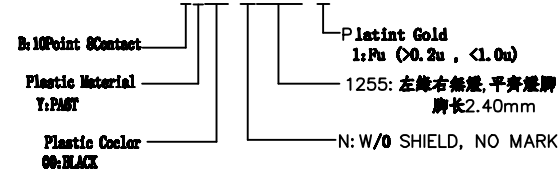

TOLERANCE	SIGNATURES		DATE	HUNTER 寰拓科技股份有限公司 東莞行特電子有限公司	
ANGLE ±0.5° .X ±0.25 .XX ±0.15 .XXX ±0.10	DESIGN:	Loen	2023-08-28		
	CHECKED:	David	2023-08-28	TITLE	RJ45 W/ LED 1X3 PORTS FULL PACKED
	APPROVAL:	Andy	2023-08-28		
SHEET	SCALE	UNIT	REV	PART NO.	PJ-C3-BY00-N1255-1
1 OF 1		mm	A/01		